

CLEARLED : SP-F138A-1



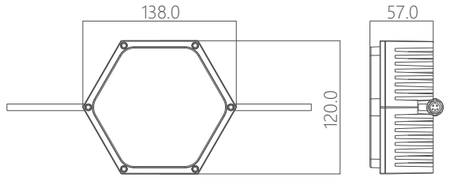

FEATURES

- Support DMX512/Art-net bus-mastering technology;
- Integrated snap, no joint, anti-pull style link design;
- Die-cast aluminum structure, high thermal coefficient, large viewing angle
- Outdoor lighting and static special protection design;
- The latest patented technology products, anti glare, effectively reduce light pollution




Light Distribution Curve

BASIC MODEL


Model	Cabinet Material	Light Source	Color	Working Voltage	Working Power	Viewing Angle
SP-F138A60L00RGB	Cast Aluminum+PC	SMD3535	RGB	DC24V	15W	120°
SP-F138A12L0RGBW	Cast Aluminum+PC	SMD5050 4-in-1	RGBW	DC24V	15W	120°
SP-F138A12L0000W	Cast Aluminum+PC	SMD3030	W	DC24V	15W	120°
SP-F138A36L0000W	Cast Aluminum+PC	SMD2835	W	DC24V	15W	120°

CLEARLED : SP-F138A-1


INSTALLATION INSTRUCTIONS

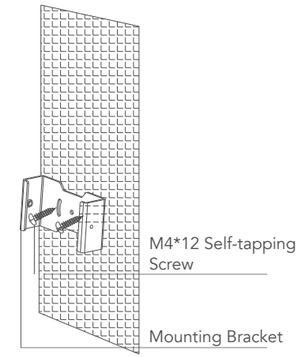

TOP 1

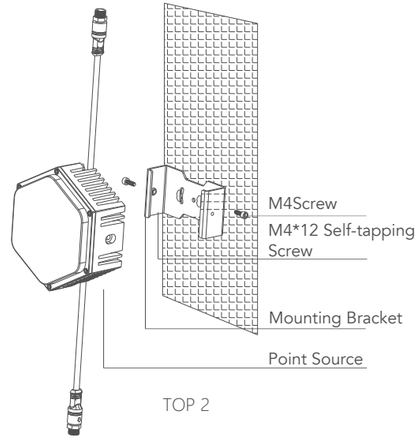

TOP 2



SPECIFICATION

Color	RGB/RGBW/W
Light Source	SMD3535/SMD2835/SMD5050/SMD3030
IC Model	DMX512
Gray scale	8bit/16bit
Refresh rate	200Hz~4KHz
Material	Cast Aluminum+PC
Weight	738g
Source Life	≥50000h
Working Temperature	-40°C~65°C
Protection Rating	IP67
Flame Rating	V-0
Anti UV grade	Grade 4

TF + 1 888 533 8853 | CAN +1 778 373 5701 | info@clearled.com | **www.clearled.com**